


Series WY26 High Temperature Resistant Circular Connectors

This series of connectors are suitable for connecting circuits in test instruments of oil well.

PRODUCT EXAMPLES



WY26T

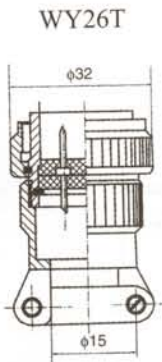


Environmental Condition

Temp range	-55 ~ + 175°C
RH	90% ~ 95%, +40°C
Vibration	15m/S ² , 10 ~ 2000HZ
Shock	50m/S ²



WY26Z

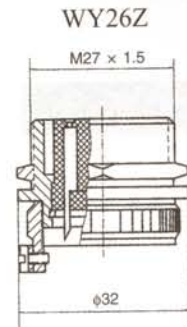

TECHNICAL CHARACTERISTIC

Working voltage	380V
Working current	3A
Contact resistance	≦ 0.005Ω
Insulation resistance	≧ 1000MΩ
Normal	≧ 100MΩ
200°C After 6 hours	≧ 100MΩ
After moisture test	≧ 100MΩ
Normal Disengage force	0.1 ~ 0.3kgf
200°C After 6 hours	≧ 0.08kgf
Test voltage	1500V
Normal	1500V
200°C After 6 hours	1000V
After moisture test	1000V
Durability	500 cycles